


Transflex® Seismic 1600 - 3200

Rosturi de dilatare seismice, cu deplasari mari, pentru poduri, pasaje si viaducte.

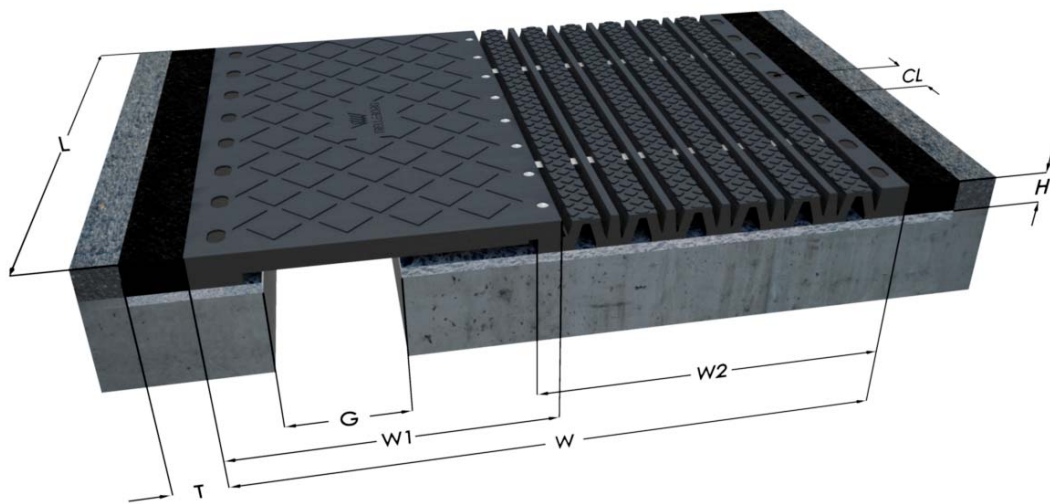

Modele	Module											Bolturi		
	Deplasare (mm)	Deplasare Transversala (mm)	L (mm)	î (mm)	l (mm)	l1 (mm)	l2 (mm)	Gr. (kg)	CL (mm)	G (mm)	T (mm)	Mxb (mm)	Øa (mm)	b1 (mm)
TR 1600 S	350 (±175)	200 (±100)	1600	85	1280	675	675	460	200	220	170	M-20 x 200	22	55
TR 2000 S	450 (±225)	284 (±142)	1600	85	1520	775	815	585	200	270	170	M-20 x 200	22	55
TR 2400 S	540 (±270)	340 (±170)	1600	85	1760	875	955	710	200	320	170	M-20 x 200	22	55
TR 2800 S	630 (±315)	388 (±194)	1600	85	1990	965	1095	765	200	370	170	M-20 x 200	22	55
TR 3200 S	720 (±360)	444 (±222)	1600	85	2230	1065	1235	930	200	420	170	M-20 x 200	22	55