


Transflex® Seismic 3600 - 6400

Rosturi de dilatație seismice, cu deplasări mari, pentru poduri, pasaje și viaducte.

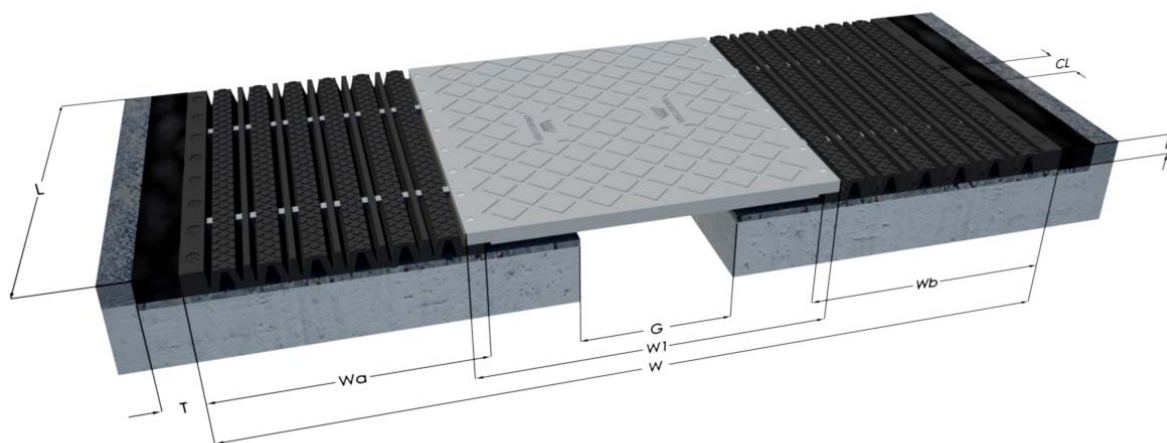

Modele	Module											Bolturi			
	Deplasare (mm)	Deplasare Transversala (mm)	L (mm)	î (mm)	l (mm)	l1 (mm)	l2 (mm)		Gr. (kg)	CL (mm)	G (mm)	T (mm)	Mxb (mm)	Øa (mm)	b1 (mm)
TR 3600 S	800 (±400)	484 (±242)	1600	85	2460	1090	675	815	1050	200	470	170	M-20 x 200	22	55
TR 4000 S	900 (±450)	568 (±284)	1600	85	2700	1190	815	815	1250	200	520	170	M-20 x 200	22	55
TR 4400 S	990 (±495)	624 (±312)	1600	85	2940	1290	815	955	1440	200	570	170	M-20 x 200	22	55
TR 4800 S	1080 (±540)	680 (±340)	1600	85	3180	1390	955	955	1630	200	620	170	M-20 x 200	22	55
TR 5200 S	1170 (±585)	728 (±364)	1600	85	3420	1490	955	1095	1850	200	670	170	M-20 x 200	22	55
TR 5600 S	1260 (±630)	776 (±388)	1600	85	3660	1590	1095	1095	1980	200	720	170	M-20 x 200	22	55
TR 6000 S	1350 (±675)	832 (±416)	1600	85	3900	1690	1095	1235	2165	200	770	170	M-20 x 200	22	55
TR 6400 S	1440 (±720)	888 (±444)	1600	85	4140	1790	1235	1235	2350	200	820	170	M-20 x 200	22	55